



HAMMER UNIONS - FIGURE 201

C&C's Figure 201 has EUE (External Upset Ends) 8 round tubing threads. This union is a Flat-Face type union that utilizes a BUNA o-ring seal. The Figure 201 is available in 2 3/8" EUE and 2 7/8" EUE and is recommended for water, oil and gas applications where working pressures do not exceed 3,000 PSI NSCWP.

* Interchangeable with other major manufacturers (see warnings on last page)



Specifications


- Sizes: 2" and 2.5"
- Pressure Rating: 3,000 psi NSCWP
- End Connections: 8 Round Threaded
- BUNA-N o-ring on female sub (-20°F to 250°F)

Standard Service	
NSCWP	Test
3,000 psi	4,000 psi







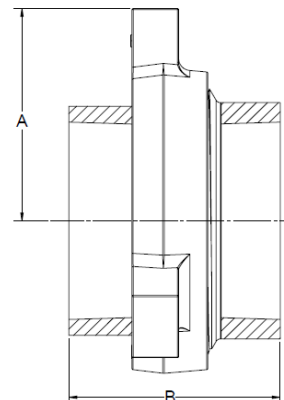











































































**All working pressures are Non-Shock Cold Working Pressure Ratings (NSCWP) at ambient temperatures (-20°F to 100°F)*

Threaded End Connections

Nominal Pipe Size	2"	3"
EUE API Size	2 3/8"	2 7/8"
Part #	U210250	U212550
Material (Sub)	A105	A105
Material (Nut)	A105	A105
Clearance Radius (A)	3.625"	4.00"
End to End (B)	5.50"	6.00"
Approx. Weight (lbs)	14.34	20.5
Box Quantity	6	4



Full Hammer Union Offering

FIGURE #	COLOR CODING	PRESSURE RATING (psi)		NOMINAL PIPE SIZES														
		Standard Service		0.5"	0.75"	1"	1.25"	1.5"	2"	2.5"	3"	4"	5"	6"	8"	10"	12"	
		NSCWP	Test															
100		1,000	1,500															
110		2,500 4,000	3,750 6,000															
200		2,000	3,000															
201		3,000	4,000															
206		2,000	3,000															
207		2,000	3,000															
26H		400	800															
211		2,000	3,000															
300		2,000 2,500 12,500	3,000 3,750 18,750															
301		3,000	4,500															
400		4,000	6,000															
602		6,000	9,000															
607 (CGC)		6,000	9,000															
1002		10,000	15,000															
1003		7,500 10,000	11,250 15,000															
1502		15,000	22,500															

 **PRODUCT WARNINGS** 

Failure to follow these warnings could result in failure and possible personal injury, death, or property damage:

- C&C products should be used only by qualified, trained individuals experienced in the safe and proper handling of hammer unions and other couplings. Users must follow all applicable specifications and industry best practices for the safe installation and use of C&C products.
 - Never exceed the recommended pressure rating or mix components with different pressure ratings, as mismatched components can lead to failure under pressure, resulting in death, personal injury, or property damage.
 - Never strike, tighten, or loosen pressurized components or connections.
 - Never exceed the non-shock cold rated pressure (NSCWP) of the product. Complete and proper assembly of all components and connections is essential in order to attain the rated NSCWP.
 - Never use any worn, eroded, or corroded components or connections. If any component of the union or connection is worn, eroded, or corroded, replace immediately.
 - Never strike hammer unions that have deformed or flattened lugs.
 - Never use C&C products in suspension applications.
 - Never expose standard service components or couplings to sour gas fluids. Do not interchange sour gas components or couplings with standard service components or couplings.
 - Always use extra care when working with carbon steel products in temperatures below 32°F/0°C. Freezing temperatures lower the impact strength of carbon steel.
 - Always take all appropriate safety precautions and wear all appropriate protective equipment when assembling, disassembling, installing, or removing any C&C product.
 - Always immediately remove from service any component or coupling from which leakage is detected.
 - Carefully select the appropriate component or coupling for your intended use.
 - Our standard unions are not dual certified for sour service/NACE applications. If you need a union for sour service/NACE applications, please let us know when you place your order.
- * If other manufacturers' components are used interchangeably, CNC Flow Control does not assume liability.